


Linear motion ball slide units series

SBR...

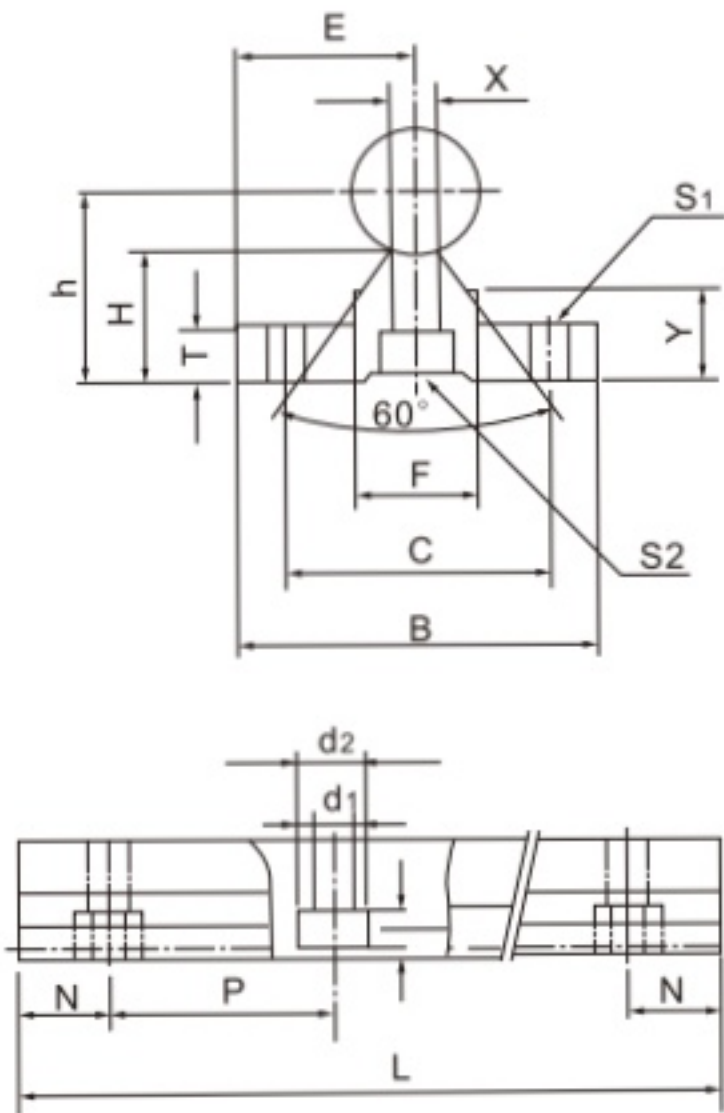

Support Designation	Shaft Dimensions	Dimensions (mm)										S2 d1×d2× l	Weight (g/m)
		E	h	B	H	T	F	X	Y	C	S1		
SBR12	φ 12	15	22.5	32	16.5	4	12	6	12	22	φ4.5	4.5×8×4.5	1.4
SBR16	φ 16	20	25	40	17.8	5	18.5	8	11.7	30	φ 5.5	5.5×9.5×5.4	2.56
SBR20	φ 20	22.5	27	45	17.7	5	19	8	10	30	φ 5.5	5.5×9.5×5.4	3.5
SBR25	φ 25	27.5	33	55	21	6	21.5	8	12	35	φ 6.6	6.6×11×6.5	5.3
SBR30	φ 30	30	37	60	22.8	7	26.5	10.3	13	40	φ 6.6	6.6×11×6.5	7.38
SBR35	φ 35	32.5	43	65	26.5	8	28	13	15.5	45	φ 9	9×14×8.6	9.68
SBR40	φ 40	37.5	48	75	29.5	9	38	15.5	17	55	φ 9	9×14×8.6	12.69
SBR50	φ 50	47.5	62	95	38.8	11	45	20	21	70	φ 11	11×17.5×10.8	20.46

Support Rail Stand Lengths and Dimensions

Designation	SBR 16	SBR 20	SBR 25	SBR 30	SBR 35	SBR 40	SBR 50
Standard Length L	190	340	250	450	460	460	470
	340	640	450	850	660	660	670
	640	940	850	1250	860	860	870
	940	1240	1250	1450	1060	1060	1070
N	20	20	25	25	30	30	35
P	150	150	200	200	200	200	200
Max.length	6000	6000	6000	1850	6000	6000	6000