


HYBRID STEPPER MOTOR

TYPE 60HSE88-5004A08-D25

SPECIFICATIONS				diagram
step angle	1.8° ±5%	current	5.0A	
phase No.	2	resistance	0.45±10%Ω	
insulation resistance	100MΩ(500V DC)	inductance	1.8±20%mH	
insulation class	B	holding torque	30kg.cm	

Remarks




GND	white
VCC	red
A+	black
A-	blue
B+	yellow
B-	green

(2m/3m/5m)



dimensions unit:mm

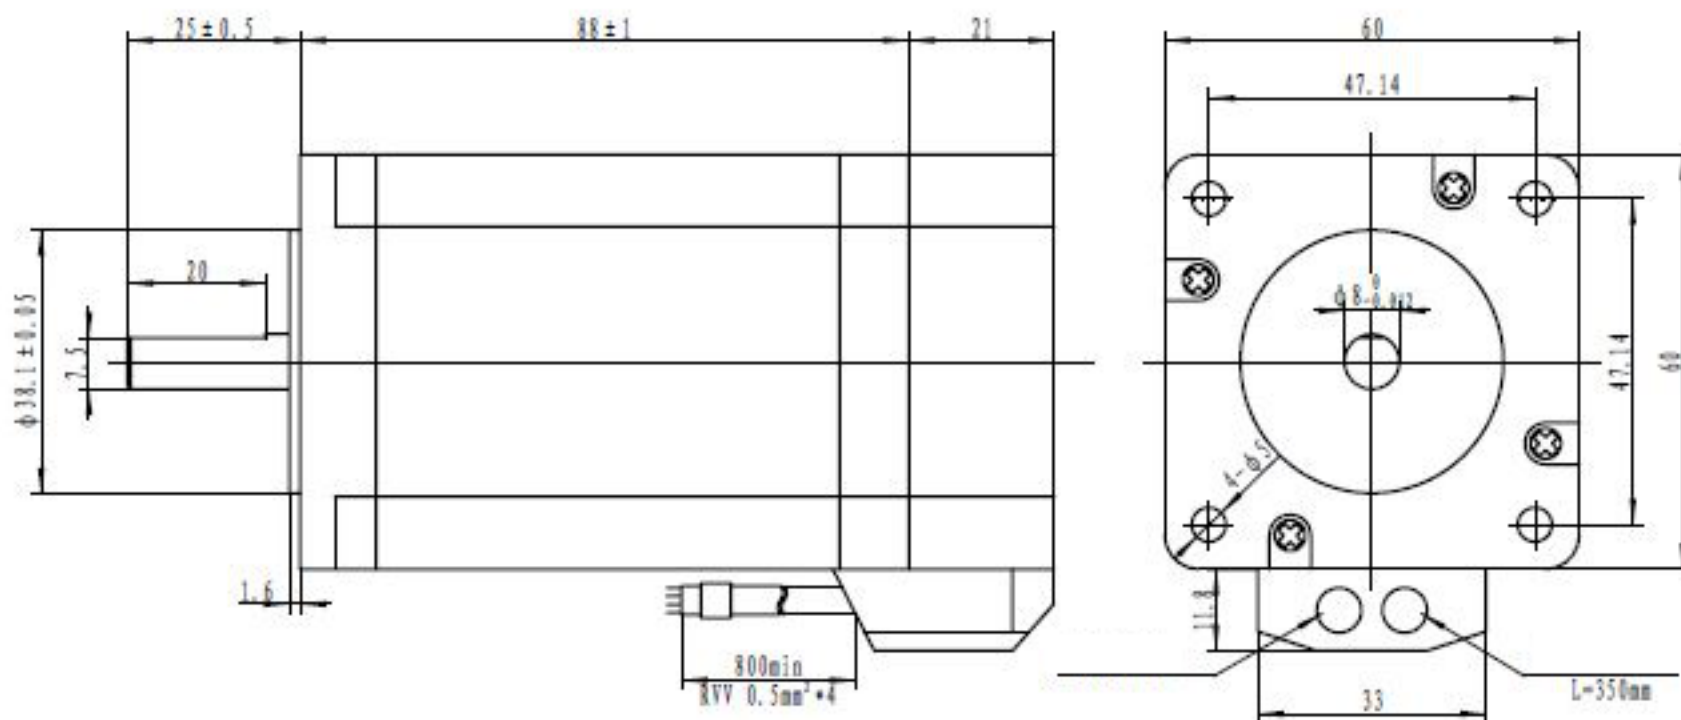

Design	Date	Check	Date	Approve	Date
--------	------	-------	------	---------	------